


100kVA Soundproof Generator



Features

- Noise Level @ 1m, 73dBA (@7m, 61dBA)
- Autostart DSE CP with MCCB
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded

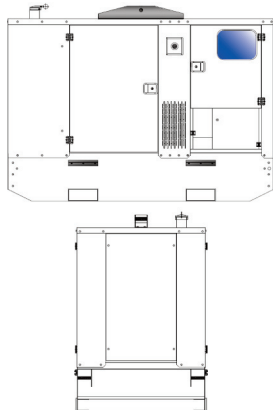

Options

- Bulk Fuel Tank
- Battery Charger
- Deep Sea 7510 Loadshare

POWERMAIN LTD

Power Continuity Specialists

Powermain has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.
Unit 15 Hedgend Ind Est, Stuart Lane, St. Nicholas-At-Wade, Birchington, Kent CT7 0NB

Generating Set	50 Hz	60 Hz
Continuous Power	100 kVA	120 kVA
Standby Power	110 kVA	132 kVA
Noise Level @ 1m / 7m	73 dBA / 61 dBA	
Power Factor	cos φ 0.8	
Continuous Power	80 kWe	100 kWe
Standby Power	88 kWe	110 kWe
Amps 3 Phase	139 A	
Fuel consumption 70% load	15.6 l/h	18.8 l/h
Engine	1500 rpm	
Model	John Deere 4045HFU79	
Continuous Power	88 kWm	
Standby Power	96.8 kWm	
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	4	
Displacement	4,500 cm ³	
Logistic Information	GX110JDE	
Fuel Tank	180 ltr	
Weight (Wet)	2,000 kg	
Dimensions (L x W x H)	255 x 110 x 174 cm	
Control Panel	Deep Sea 7310	
Auto Start	Standard	



Deep Sea 7310 Control Panel

