



400kVA Soundproof Generator



Features

- Noise Level @ 1m, 76dBA (@7m, 64dBA)
- Autostart DSE CP with MCCB
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded

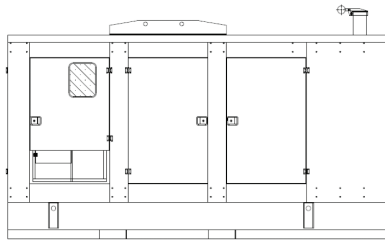

Options

- Bulk Fuel Tank
- Battery Charger

POWERMAIN LTD

Power Continuity Specialists

Powermain has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.
Unit 15 Hedgend Ind Est, Stuart Lane, St. Nicholas-At-Wade, Birchington, Kent CT7 0NB

Generating Set	50 Hz	60 Hz
Continuous Power	400 kVA	407 kVA
Standby Power	440 kVA	448 kVA
Noise Level @ 1m / 7m	76 dBA / 64 dBA	
Power Factor	cos φ 0.8	
Continuous Power	328 kW	326 kW
Standby Power	352 kW	358 kW
Amps 3 Phase	556 A	
Fuel consumption 70% load	57.5 l/h	70.1 l/h
Engine	1500 rpm	1800 rpm
Model	Perkins 2206C-E13 TAG3	
Continuous Power	349 kW	349 kW
Standby Power	392 kW	381 kW
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	6	
Displacement	124,500 cm ³	
Logistic Information	GQ451PE	
Fuel Tank	1,000 ltr	
Weight (Wet)	6,400 kg	
Dimensions (L x W x H)	420 x 190 x 240 cm	
Control Panel	Deep Sea 7310	
Auto Start	Standard	



Deep Sea 7310 Control Panel

