


# 60kVA Soundproof Generator



## Features

- Noise Level @ 1m, 73dBA (@7m, 61dBA)
- Autostart DSE CP with MCCB
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded

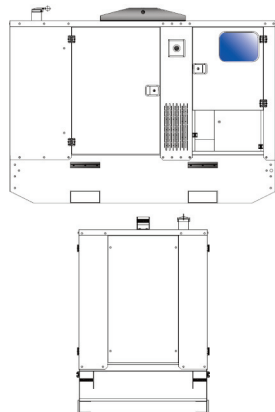

## Options

- Bulk Fuel Tank
- Battery Charger

# POWERMAIN LTD

## Power Continuity Specialists

Powermain has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.  
Unit 15 Hedgend Ind Est, Stuart Lane, St. Nicholas-At-Wade, Birchington, Kent CT7 0NB

Generating Set	50 Hz
Continuous Power	60 kVA
Standby Power	66 kVA
Noise Level @ 1m / 7m	73 dBA / 61 dBA
Power Factor	cos φ 0.8
Continuous Power	48 kW <sub>e</sub>
Standby Power	53 kW <sub>e</sub>
Amps 3 Phase	83 A
Fuel consumption 70% load	10.6 l/h
Engine	1500 rpm
Model	John Deere 4045TFU70
Continuous Power	53 kW <sub>m</sub>
Standby Power	59 kW <sub>m</sub>
Aspiration	Turbocharged
Cooling System	Water
Speed Governor	Mechanical
Cylinder Number	4
Displacement	4,500 cm <sup>3</sup>
Logistic Information	GX72JDE
Fuel Tank	185 ltr
Weight (Wet)	1,755 kg
Dimensions (L x W x H)	228 x 110 x 167 cm
Control Panel	Deep Sea 7210
Auto Start	Standard



Deep Sea 7210 Control Panel

