



1,000kVA Soundproof Generator



Features

- Noise Level @ 1m, 81dBA
- Autostart DSE CP
- Motorised MCCB rated at 1,600A
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Four Point Lift
- Fork Lift Pockets
- Fully Bunded
- Battery Charger

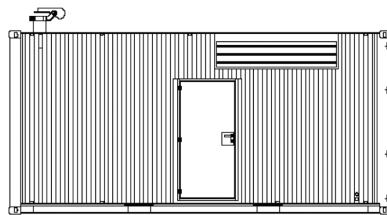

Options

- Bulk Fuel Tank

POWERMAIN LTD

Power Continuity Specialists

Powermain has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.
Unit 15 Hedgend Ind Est, Stuart Lane, St. Nicholas-At-Wade, Birchington, Kent CT7 0NB

Generating Set	50 Hz	60 Hz
Continuous Power	1,000 kVA	1,155 kVA
Standby Power	1,100 kVA	1,270 kVA
Noise Level @ 1m	81 dBA	
Power Factor	cos φ 0.8	
Continuous Power	800 kWe	924 kWe
Standby Power	880 kWe	1,016 kWe
Amps 3 Phase	1390 A	
Fuel consumption 70% load	141 l/h	165 l/h
Engine	1500 rpm	1800 rpm
Model	Cummins QST30G4	
Continuous Power	861 kWm	973 kWm
Standby Power	951 kWm	1,075 kWm
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	12	
Displacement	30,480 cm ³	
Logistic Information	GQ1100C-C20H	
Fuel Tank	1,600 ltr	
Weight (Wet)	12,100 kg	
Dimensions (L x W x H)	Container 20 ft high cube	
Control Panel	Deep Sea 7510	
Auto Start	Standard	



Deep Sea 7510 Loadshare Control Panel

