



800kVA Soundproof Generator



Features

- Noise Level @ 1m, 83dBA (@7m, 71dBA)
- Autostart DSE CP
- Motorised MCCB rated at 1,250A
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded
- Battery Charger

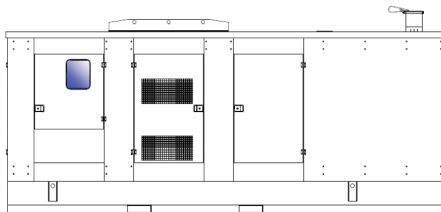

Options

- Bulk Fuel Tank

POWERMAIN LTD

Power Continuity Specialists

Powermain has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.
Unit 15 Hedgend Ind Est, Stuart Lane, St. Nicholas-At-Wade, Birchington, Kent CT7 0NB

Generating Set	50 Hz	60 Hz
Continuous Power	800 kVA	910 kVA
Standby Power	880 kVA	1000 kVA
Noise Level @ 1m / 7m	83 dBA / 71 dBA	
Power Factor	cos φ 0.8	
Continuous Power	640 kWe	728 kWe
Standby Power	704 kWe	800 kWe
Amps 3 Phase	1,112 A	
Fuel consumption 70% load	113 l/h	129 l/h
Engine	1500 rpm	1800 rpm
Model	Cummins QSK23G3	
Continuous Power	682 kWm	776 kWm
Standby Power	739 kWm	857 kWm
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	6	
Displacement	23,150 cm ³	
Logistic Information	GQ901C	
Fuel Tank	580 ltr	
Weight (Wet)	9,040 kg	
Dimensions (L x W x H)	555 x 220 x 245 cm	
Control Panel	Deep Sea 7510	
Auto Start	Standard	



Deep Sea 7510 Loadshare Control Panel

